



PRODUCT SPECIFICATIONS

Legacy Standing Seam

901 Major Bennett Drive
Peterborough, ON
K9J 0C2

Phone: 705-639-2857
Toll Free: 1-888-556-7623
Fax: 705-639-2859
www.havelockmetal.com

Overview: Timeless and sophisticated, the elegant lines of the Legacy Standing Seam profile make it a perfect fit for your home, cottage, or business. The hidden fastener system will transform any roof line into a show piece. This profile is available in Mechanical Seam or a user-friendly Snap Lock design. Both options can have a minor rib added for aesthetics as well as additional strength. Our Product Specialists can help guide you as to the best fit for your project.

Associated flashings and trims are available in the same finish.

Fastening System: Hidden fastener

Applications: Exterior roofing and siding, interior cladding

Minimum Slope: Roof minimum is 2/12 (contact our office for lower slope guidance), Siding n/a

Available Gauges: 22ga, 24ga, 26ga

Panel Length: 30" minimum / 37.5' maximum if delivered. Private carrier and onsite rolling available for longer lengths.

Panel Options:

1. Snap Lock with Nail Strip – only available in 26ga
2. Snap Lock with Clip
3. Mechanical Lock

All options can be manufactured with or without a shallow ancillary minor rib. The subtle minor rib provides additional strength to the panel.

Panel Coverage for 1" Rib Height:

- Snap Lock with Nail Strip 15.625"
- Snap Lock with Nail Strip and Minor Rib 15.5"
- Snap Lock with Clip 16.875"
- Snap Lock with Clip and Minor Rib 16.75"
- Mechanical Lock 17"
- Mechanical Lock with Minor Rib 16.875"
- Custom widths available.

Lbs/Covered Sq Ft for 1" Rib Height:

- Snap Lock with Nail Strip 0.95 lbs/covered sq ft (26ga)
- Snap Lock with Nail Strip and Minor Rib 0.96 lbs/covered sq ft (26ga)
- Snap Lock with Clip 1.46 lbs/covered sq ft (22ga), 1.17 lbs/covered sq ft (24ga), 0.88 lbs/covered sq ft (26ga)
- Snap Lock with Clip and Minor Rib 1.47 lbs/covered sq ft • (22ga), 1.18 lbs/covered sq ft (24ga), 0.88 lbs/covered sq ft (26ga)
- Mechanical Lock 1.45 lbs/covered sq ft (22ga), 1.16 lbs/covered sq ft (24ga), 0.87 lbs/covered sq ft (26ga)
- Mechanical Lock with Minor Rib 1.46 lbs/covered sq ft (22ga), 1.17 lbs/covered sq ft (24ga), 0.88 lbs/covered sq ft (26ga)

Panel Coverage for 1.5" Rib Height:

- Snap Lock with Nail Strip 14.875"
- Snap Lock with Nail Strip and Minor Rib 14.75"
- Snap Lock with Clip 15.25"
- Snap Lock with Clip and Minor Rib 15.125"
- Mechanical Lock 15.75"
- Mechanical Lock with Minor Rib 15.625"
- Custom widths available.

Lbs/Covered Sq Ft for 1.5" Rib Height:

- Snap Lock with Nail Strip 1.00 lbs/covered sq ft (26ga)
- Snap Lock with Nail Strip and Minor Rib 1.00 lbs/covered sq ft (26ga)
- Snap Lock with Clip 1.62 lbs/sq ft (22ga), 1.30 lbs/sq ft (24ga), 0.97 lbs/sq ft (26ga)
- Snap Lock with Clip and Minor Rib 1.63 lbs/sq ft (22ga), 1.31 lbs/sq ft (24ga), 0.98 lbs/sq ft (26ga)
- Mechanical Lock 1.57 lbs/sq ft (22ga), 1.25 lbs/sq ft (24ga), 0.94 lbs/sq ft (26ga)
- Mechanical Lock with Minor Rib 1.58 lbs/sq ft (22ga), 1.26 lbs/sq ft (24ga), 0.95 lbs/sq ft (26ga)


Legacy Standing Seam

Panel Diagram for Snap Lock with Nail Strip:

Individual Panel - 1" Rib Height




Individual Panel - 1.5" Rib Height

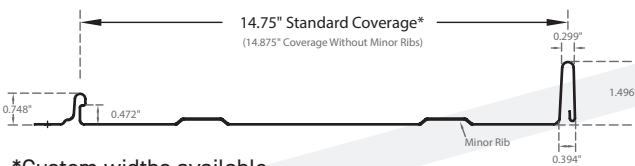

*Custom widths available.

Locking Detail




Panel Diagram for Mechanical Lock:

Individual Panel - 1" Rib Height



Individual Panel - 1.5" Rib Height

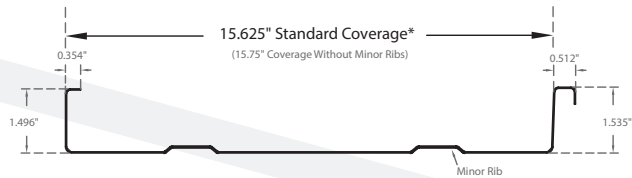

*Custom widths available.

Locking Detail




Panel Diagram for Snap Lock with Clip:

Individual Panel - 1" Rib Height




Individual Panel - 1.5" Rib Height

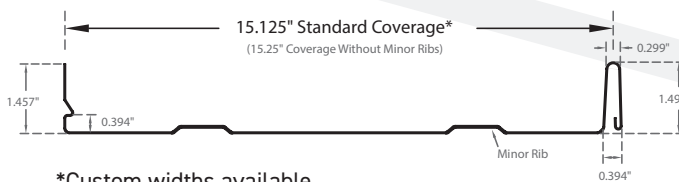

*Custom widths available.

Locking Detail



Roofing Trims to Consider (suitable for 1" and 1.5" Rib Height):

- Corner Cap (CC)
- Downspout 2-piece (DS)
- Eavestrough 5" (ET 5)
- Eavestrough 6" (ET 6)
- Eavestrough Outlet 5" and 6" (ETO)
- End Cap for 5" Eavestrough (ECET 5)
- End Cap for 6" Eavestrough (ECET 6)
- End Cap R6 (ECR6)
- End Cap R8 (ECR8)
- Fascia 12" (FAS 12)
- Fascia 6" (FAS 6)
- Fascia 8" (FAS 8)
- Hemmed Ridge/Hip Cap (HR/HC)
- Hemmed Ridge/Hip Cap with Kick (HR/HCK)
- Legacy Back Pan (LBP)
- Legacy Eave Starter (LES)
- Legacy Gable Starter (LGS)
- Legacy Ridge Cap Universal (LRCU)
- Legacy Ridge Cap Universal 6" (LRCU6)
- Legacy Ridge Cap Universal 6" End Cap (LECU6)
- Legacy Ridge Cap Universal End Cap (LECU)



Legacy Standing Seam

Roofing Trims to Consider (suitable for 1" and 1.5" Rib Height)

Continued:

- Legacy Snow Stop (LSNO)
- Legacy Snow Stop Subtrim Galvanized 18ga (LSNOSUB 18)
- Legacy Valley (LV)
- Panel Lock Strip (PLS)
- Ridge Cap R6 (RCR6)
- Ridge Cap R8 (RCR8)
- Soffit Non-Vented 12" (SNV 12)
- Soffit Non-Vented 8" (SNV 8)
- Soffit Vented 12" (SV 12)
- Soffit Vented 8" (SV 8)

Roofing Trims to Consider (for 1" Rib Height):

- Eave Soffit/Fascia Non-Vented 1-Piece (ESFNV 1)
- Eave Soffit/Fascia Vented 1-Piece (ESFV 1)
- Flying Gable 1" (FG 1)
- Flying Gable 1" w. Hem (FGH 1)
- Gable Soffit/Fascia Non-Vented 1-Piece (GSFNV 1)
- Gable Soffit/Fascia Vented 1-Piece (GSFV)
- Legacy Cap Flashing 1" (CAP 1)
- Legacy Chimney Kit 1" (LCKIT 1)
- Legacy End Wall Flashing 1" (LEWF 1)
- Legacy Flying Gable 1" (LFGS 1)
- Legacy Gambrel Hip Cap 1" (LGHC 1)
- Legacy Ridge/Hip Cap 1" (LRHC 1)
- Legacy Side Wall Flashing 1" (LSWF 1)
- Legacy Under/Over 1" (LUOF 1)

Roofing Trims to Consider (for 1.5" Rib Height):

- Eave Soffit/Fascia Non-Vented 1-Piece (ESFNV 1.5)
- Eave Soffit/Fascia Vented 1-Piece (ESFV 1.5)
- Flying Gable 1.5" (FG 1.5)
- Flying Gable 1.5" w. Hem (FGH 1.5)
- Gable Soffit/Fascia Non-Vented 1-Piece (GSFNV 1.5)
- Gable Soffit/Fascia Vented 1-Piece (GSFV 1.5)
- Legacy Cap Flashing 1.5" (CAP 1.5)
- Legacy Chimney Kit 1.5" (LCKIT 1.5)
- Legacy End Wall Flashing 1.5" (LEWF 1.5)
- Legacy Flying Gable 1.5" (LFGS 1.5)
- Legacy Gambrel Hip Cap 1.5" (LGHC 1.5)
- Legacy Ridge/Hip Cap 1.5" (LRHC 1.5)
- Legacy Side Wall Flashing 1.5" (LSWF 1.5)
- Legacy Under/Over 1.5" (LUOF 1.5)

Siding Trims to Consider (for 1" and 1.5" Rib Height):

- Corner Cap (CC)
- Fascia 12" (FAS 12)
- Fascia 6" (FAS 6)

- Fascia 8" (FAS 8)
- Panel Lock Strip (PLS)
- Round Track Cover (RTC)
- Soffit Non-Vented 12" (SNV 12)
- Soffit Non-Vented 8" (SNV 8)
- Soffit Vented 12" (SV 12)
- Soffit Vented 8" (SV 8)
- Square Track Cover (STC)
- Z-Girt (ZGIRT)

Siding Trims to Consider (for 1" Rib Height):

- Drip Cap 3/4" (DC 0.75)
- Drip Cap Commercial 3/4" (DCC 0.75)
- Eave Soffit/Fascia Non-Vented 1-Piece (ESFNV 1)
- Eave Soffit/Fascia Vented 1-Piece (ESFV 1)
- Gable or Base Trim Commercial 1" (GBTC 1)
- Gable Soffit/Fascia Non-Vented 1-Piece (GSFNV 1)
- Gable Soffit/Fascia Vented 1-Piece (GSFV)
- Jamb Flashing with 'J' 1" (JFJ 1)
- J-Trim 1" (JT 1)
- J-Trim Commercial 1" (JTC 1)
- Legacy End Wall Flashing 1" (LEWF 1)
- Legacy Side Wall Flashing 1" (LSWF 1)
- Outside Corner with 'J' 1" (OCJ 1)
- T-Trim 1" (TT 1)
- Wall Ceiling Trim 1" (WCT 1)
- Wall Soffit Trim 1" (WST 1)

Siding Trims to Consider (for 1.5" Rib Height):

- Drip Cap 1-1/4" (DC 1.25)
- Eave Soffit/Fascia Non-Vented 1-Piece (ESFNV 1.5)
- Eave Soffit/Fascia Vented 1-Piece (ESFV 1.5)
- Gable or Base Trim Commercial 1-1/2" (GBTC 1.5)
- Gable Soffit/Fascia Non-Vented 1-Piece (GSFNV 1.5)
- Gable Soffit/Fascia Vented 1-Piece (GSFV 1.5)
- Jamb Flashing with 'J' 1-1/2" (JFJ 1.5)
- J-Trim 1-1/2" (JT 1.5)
- J-Trim Commercial 1-1/2" (JTC 1.5)
- Legacy End Wall Flashing 1.5" (LEWF 1.5)
- Legacy Side Wall Flashing 1.5" (LSWF 1.5)
- Outside Corner with 'J' 1-1/2" (OCJ 1.5)
- Wall Ceiling Trim 1-1/2" (WCT 1.5)
- Wall Soffit Trim 1-1/2" (WST 1.5)

Accessories Recommended:

- #10 x 1" Galvanized Pancake Fasteners
- Clips – Speak to one of our Product Specialist to determine if clips are appropriate for your project
- Legacy Bender 15" Galvanized 18ga (BEND15 18)



Legacy Standing Seam

Sustainability: The demand for environmentally friendly, or green product groups within the construction industry has allowed steel products to become part of the renewable or reusable requirements for programs such as LEED. The raw material steel in our panels and trims contains a minimum of 30% recycled content, comprised of 24% post-consumer and 6.8% post-industrial and is 100% recyclable.

Warranty: 40-year is most common but varies depending on the paint finish. Consult with a Havelock Metal Co. Product Specialist for further information.

Material Disclaimer: Oil-canning or waving, is a characteristic of flat metal panels and is not considered a defect.

Packaging: Orders are shipped in crates. Small orders may be able to be bundled and wrapped.

Installation: Recommended to install onto a flat surface secured to structural framing or a flat wall surface.

Colours: Please contact a Havelock Metal Co. Product Specialist for available colours and gauges. We stock a wide range of material, however additional colours, textures, prints, woodgrains, metallics and gauges may be available with a minimum order quantity.

Please be advised Textures, Woodgrains and Metallic Colours are batch-sensitive. We strongly advise against mixing batches on any project.

Material Specifications:

SMP Pre-Painted Steel

SMP (Silicone Modified Polyester) coating is made of polyester and silicone intermediates. Silicone acts to improve the gloss retention and weather resistance of the coatings. The biggest advantage of SMP paint systems over PVDF (Kynar®) is the price.

**Available in 22ga – 26ga
Gr33/Gr50, G90 & AZ50**

PROPERTY	SMP COATING TEST METHOD	SMP COATING SPECIFICATION
Dry Film Thickness	ASTM D 1400-94	0.75-1.85 Mil
	ASTM D 1005-95	0.90-1.15 Mil
Specular Gloss	ASTM D 523-89 @ 60°	20-35
Humidity Resistance	ASTM D 2247 (100% relative humidity @ 95°)	Passes 1,000 hrs.
Salt Spray	ASTM B 117 (5% salt spray @ 95°)	Passes 1,000 hrs.
Acid Pollutant Resistance	ASTM D 1308-87 (20% sulfuric acid 18 hrs., 10% muriatic acid 15 min.)	No effect
Graffiti Resistance	Cleanability of Defaced Panels (spray paint, pens, etc.)	No effect
Abrasion Resistance	ASTM D 968-93 (to expose 5/32" of substrate)	25-40 Litres
Chalk Resistance	ASTM D 4214 (Florida Exposure @ 45° S)	Vertical: Rating not < 8 @ 10 yrs. Non-Vertical: Rating not < 7 @ 10 yrs.
Colour Retention	ASTM 2244 - Hunter Units (Florida Exposure @ 45° S)	Vertical: Not > 5Δ Hunter Units @ 10 yrs. Non-Vertical: Not > 6Δ Hunter Units @ 10 yrs.



Legacy Standing Seam

PROPERTY	SMP COATING TEST METHOD	SMP COATING SPECIFICATION
Adhesion	ASTM D 3359-95a (Reverse Impacted 1/16" crosshatched)	No adhesion loss
Pencil Hardness	ASTM 3363	H-2H (NCCA II-12)
Reverse Impact	ASTM D 2794-93 (3,000 x inches of metal thickness)	Passes – No pick off with Scotch #610 tape
Flexibility T-Bend	ASTM D 4145-83 (No crack, no pick-off)	2T-4T bends, no loss of adhesion
Film Cure	ASTM D 5402 (≥ 100 double MEK rubs)	Passes
Fire Rating	E 84	Fuel contributed zero, Passes
Weatherometer	D 6695	Passes 3,000 hrs.
UV Exposure	D 4587	Passes 1,000 hrs.
Film Integrity		40 years – limited warranty

Hunter Units: a standard of key colour scales and colour values that are used by industry for colour control. Oil Canning is a characteristic of metal roofing and not a cause for material rejection. Removable protective film is available upon request on all SMP sheet products. This protective film MUST be removed immediately after installation. Due to high mechanical properties, Grade 80 material is not suitable for Trims, Architectural Panels, Board and Batten or Legacy Standing Seam Panels.

SMP Pre-Painted TEXTURED Steel

SMP (Silicone Modified Polyester) TEXTURED coating is a low gloss finish made of polyester and silicone intermediates. Silicone acts to improve the gloss retention and weather resistance of the coatings. The biggest advantage of SMP paint systems over PVDF (Kynar®) is the price.

The TEXTURED finish not only delivers an eye-catching, 3D visual effect to the product, but also provides a surface that is more durable and scratch-resistant than standard pre-painted product. This texturized finish also offers stronger colour retention and the best resistance yet to chalking and fading.

A perfect product for both residential and commercial projects, SMP Pre-Painted TEXTURED Steel is ideal for roofing, wall panel and architectural applications where enhanced visual depth and proven performance are desired.

**Available in 24ga and 26ga
Gr33/Gr50, G90 & AZ50**

PROPERTY	SMP COATING TEST METHOD	SMP COATING SPECIFICATION
Dry Film Thickness	ASTM D 4138	Top Coat: 0.7-0.8 Mil / Primer: 0.2-0.3 Mil
Specular Gloss	ASTM D 523 @ 60°	20-80
Humidity Resistance	ASTM D 2247 (100% relative humidity @ 95°)	Passes 1,000 hrs. with no field blisters
Salt Spray	ASTM B 117 (5% salt spray @ 95°)	Passes 1,000 hrs. with creep from scribe



Legacy Standing Seam

≤ 1/8", none or few #8 blisters

PROPERTY	SMP COATING TEST METHOD	SMP COATING SPECIFICATION
Water Immersion	ASTM D 870 (100°F 168 hrs.)	No field blisters with min. colour change
Viscosity	ASTM D 4212 (No. 4 Zahn cup)	25 to 45 seconds
Abrasion Resistance	ASTM D 968-93 (to expose 5/32" of substrate)	35 ± 5 Litres
Chalk Resistance (Southern Florida Exposure)	ASTM D 659	Chalk: Rating not < 8 @ 90° angle and 6 @ non-vertical angle @ 30 yrs.
Colour Retention (Southern Florida Exposure)	ASTM 2244	Colour: Rating not > 5ΔE Hunter Units @ 90° vertical angle and 7ΔE non-vertical @ 30 yrs.
Adhesion	ASTM D 3359	No adhesion loss
Pencil Hardness	ASTM D 3363	F to 2H
Reverse Impact	ASTM D 2794 (3x metal thickness inch-lbs.)	No adhesion loss
Flexibility T-Bend	ASTM D 4145 (No crack, no pick-off)	2T-4T bends, no loss of adhesion
VOC (theoretical)	ASTM D 3960	3.0 to 4.0 lbs. per gallon
Film Integrity		40 years – limited warranty

Hunter Units: a standard of key colour scales and colour values that are used by industry for colour control. Oil Canning is a characteristic of metal roofing and not a cause for material rejection.

PVDF (Kynar®) Pre-Painted Steel

PVDF (polyvinylidene fluoride) paints, also known as Kynar 500®, are known throughout the steel industry for their exceptional gloss, colour retention, and overall performance. Used by some of the most prominent architects throughout the world, PVDF pre-painted steel is utilized in a wide variety of residential, commercial, institutional, and industrial applications.

PVDF pre-painted steel products provide architects, designers, and building owners with a building product solution that is not only sustainable but satisfies both the aesthetics and performance expectations of even the most rigorous projects. Complete with a warranty, these products offer environmental benefits such as recyclability, durability, low maintenance, and potential energy savings when used in a roof application. From roofing to wall panels to soffits and beyond, PVDF steel products are the right fit for your high-end architectural projects. The biggest advantage of Kynar® paint systems over SMP is the exceptional long-term performance.

Available in 22ga and 24ga
Gr50, G90 & AZ50



havelockmetal.com | COVERED FOR LIFE

901 Major Bennett Dr., Peterborough, ON K9J 0C2

TF: 1-888-556-7623 / P: 705-639-2857 / F: 705-639-2859

Legacy Standing Seam

PROPERTY	PVDF COATING TEST METHOD	PVDF COATING SPECIFICATION
Dry Film Thickness	ASTM D 1400-94	0.75-1.85 Mil
	ASTM D 1005-95	0.90-1.15 Mil
Specular Gloss	ASTM D 523-89 @ 60°	20-35
Humidity Resistance	ASTM D 2247 (100% relative humidity @ 95°)	Passes 2,000 hrs.
Salt Spray	ASTM B 117 (5% salt spray @ 95°)	Passes 1,000 hrs. with < 5% #6 blisters
Acid Pollutant Resistance	ASTM D 1308-87 (20% sulfuric acid 18 hrs., 10% muriatic acid 15 min.)	No effect
Graffiti Resistance	Cleanability of Defaced Panels (spray paint, pens, etc.)	No effect
Abrasion Resistance	ASTM D 968-93 (to expose 5/32" of substrate)	100 Litres
Chalk Resistance	ASTM D 4214 (Florida Exposure @ 45° S)	Rating not < 8 @ 20 yrs.
Colour Retention	ASTM 2244 – Hunter Units (Florida Exposure @ 45° S)	Rating not > 5Δ Hunter Units @ 20 yrs.
Adhesion	ASTM D 3359-95a (Reverse Impacted 1/16" crosshatched)	No adhesion loss
Pencil Hardness	ASTM D 3363	HB-2H
Reverse Impact	ASTM D 2794-93 (3,000 x inches of metal thickness)	No cracking or loss of adhesion
Flexibility T-Bend	ASTM D 4145-83 (No crack, no pick-off)	0T-3T bends, no loss of adhesion
Mandrel	ASTM D 522-93A (180 bend around 1/8" mandrel)	No cracking

Hunter Units: a standard of key colour scales and colour values that are used by industry for colour control. Oil Canning is a characteristic of metal roofing and not a cause for material rejection. Removable protective film is available upon request. This protective film **MUST** be removed immediately after installation.

PVDF (Kynar®) Pre-Painted WOODGRAIN Steel

PVDF (polyvinylidene fluoride) paints, also known as Kynar 500®, are known throughout the steel industry for their exceptional gloss, colour retention, and overall performance. The WOODGRAIN prints are available in a variety of natural colours and patterns offering an authentic woodgrain look providing the aesthetic you need for your project’s interior or exterior applications. These prints are manufactured using an offset gravure printing process. The offset gravure printing process utilizes cylinders that have digital patterns etched into the surface. The etched cylinder rotates in an ink bath and ink collects within the etched pattern, with the excess ink being scraped from the roll. From there the inked pattern transfers to the steel substrate by passing between the transfer roll and an impression roll. The WOODGRAIN series has the aesthetics of wood with the benefits only steel can provide.

**Available in 24ga
Gr50, G90 & AZ50**



havelockmetal.com | COVERED FOR LIFE

901 Major Bennett Dr., Peterborough, ON K9J 0C2

TF: 1-888-556-7623 / P: 705-639-2857 / F: 705-639-2859

Legacy Standing Seam

PROPERTY	PVDF COATING TEST METHOD	PVDF COATING SPECIFICATION
Dry Film Thickness	ASTM D 1400-94 ASTM D 1005-95	0.75-1.85 Mil 0.90-1.15 Mil
Specular Gloss	ASTM D 523-89 @ 60°	10-15
Humidity Resistance	ASTM D 2247 (100% relative humidity @ 95°)	Passes 2,000 hrs. with no field blisters
Salt Spray	ASTM B 117 (5% salt spray @ 95°)	Passes 1,000 hrs. with < 5% #6 blisters
Acid Pollutant Resistance	ASTM D 1308-87 (20% sulfuric acid 18 hrs., 10% muriatic acid 15 min.)	No effect
Graffiti Resistance	ASTM D 6578 (Cleanability of Defaced Panels spray paint, pens, etc.)	No effect
Abrasion Resistance	ASTM D 968-93 (to expose 5/32" of substrate)	100 Litres
Chalk Resistance	ASTM D 4214 (Florida Exposure @ 45° S)	Rating not < 8 @ 20 yrs.
Colour Retention	ASTM 2244 – Hunter Units (Florida Exposure @ 45° S)	Rating not > 5Δ Hunter Units @ 20 yrs.
Adhesion	ASTM D 3359-95a (Reverse Impacted 1/16" crosshatched)	No adhesion loss
Pencil Hardness	ASTM D 3363	HB-H
Reverse Impact	ASTM D 2794-93 (3,000 x inches of metal thickness)	No cracking or loss of adhesion
Flexibility T-Bend	ASTM D 4145-83 (No crack, no pick-off)	2T bends, no loss of adhesion
Mandrel	ASTM D 522-93A (180 bend around 1/8" mandrel)	No cracking
Film Integrity		25 years – limited warranty

Hunter Units: a standard of key colour scales and colour values that are used by industry for colour control. Oil Canning is a characteristic of metal roofing and not a cause for material rejection.

Galvalume® Steel

Galvalume® refers to 55% Aluminum-Zinc Alloy Coated Steel that is cold-rolled carbon steel with a metallic coating composed of Aluminum (55%), Zinc (43.4%) and Silicon (1.6%). The 55% Aluminum-Zinc Alloy Coated Steel is a favourite of architects due to its eye-catching aesthetics, long-lasting performance, design flexibility and the vast number of potential end-use applications. The aluminium-zinc metallic coating forms a permanently bonded, tough, sacrificial coating that protects the steel from corrosion in most end-use applications.

Galvalume substrate is not warranted to be used, in or around animal confinement or agriculture. Galvalume will very rapidly deteriorate when exposed to the corrosive agents of animal confinement.

Available in 22ga – 26ga

Gr33/Gr50, G90 & AZ50



havelockmetal.com | COVERED FOR LIFE

901 Major Bennett Dr., Peterborough, ON K9J 0C2

TF: 1-888-556-7623 / P: 705-639-2857 / F: 705-639-2859